




Make the
bright choice

Product Catalogue 2023



Illuminating Australia

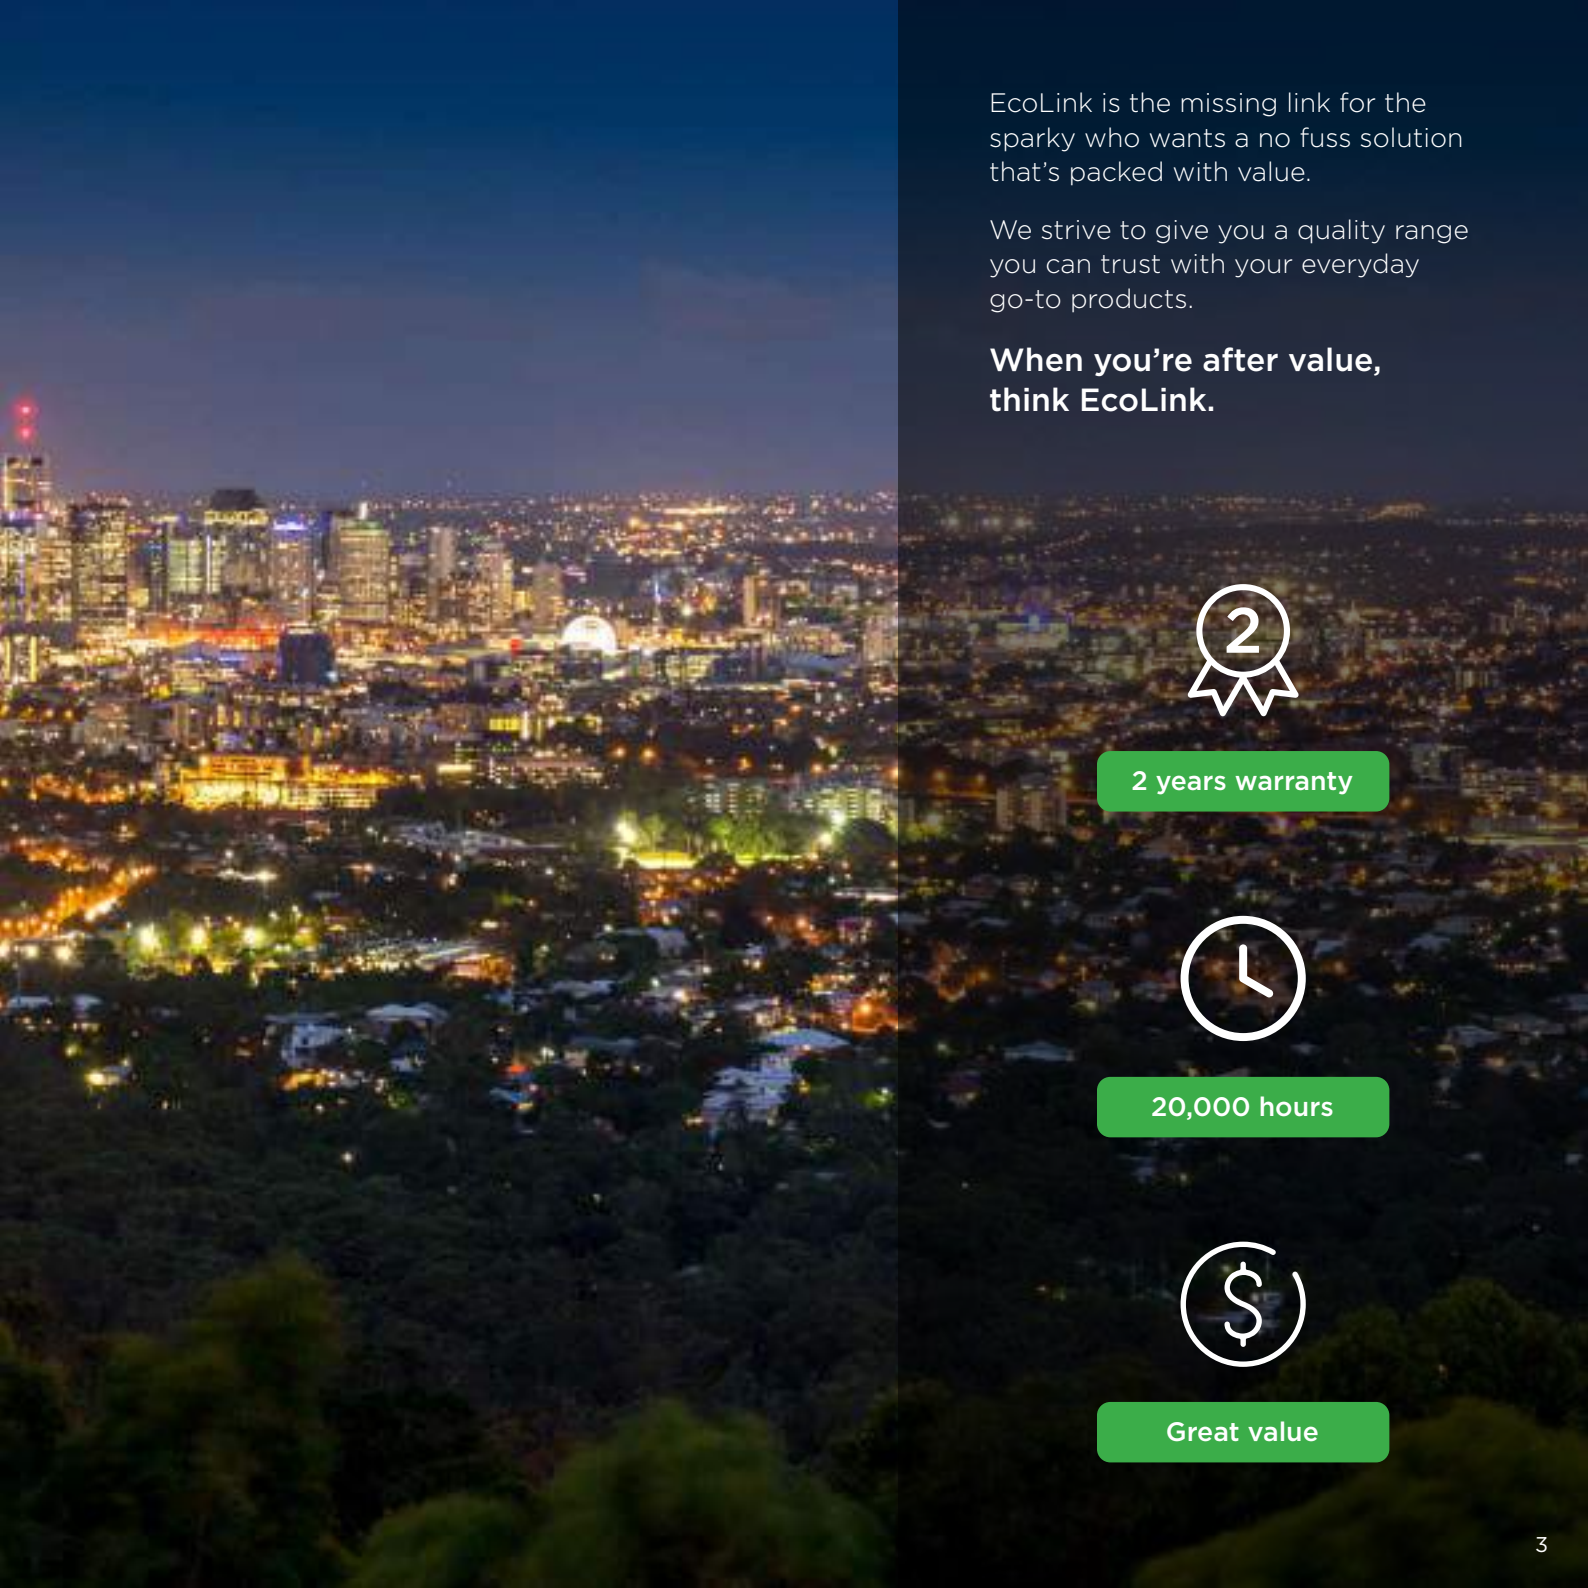

A nighttime aerial view of a city, likely Chicago, with the Willis Tower and other skyscrapers illuminated. The city lights transition into a dark, forested area in the foreground.

EcoLink is the missing link for the sparky who wants a no fuss solution that's packed with value.

We strive to give you a quality range you can trust with your everyday go-to products.

**When you're after value,
think EcoLink.**



2 years warranty



20,000 hours



Great value



Cost-efficient and reliable lamps and luminaires



RMC certification

All EcoLink products proudly carry the Regulatory Compliance Mark. So you can have confidence you are installing a product that complies with regulations.



No more straining your eyes

The versatile lamps and luminaires are designed to prevent eye strain with no visible flickering and negligible UV/IR effects.



Category index





Tri-colour Backlit Panel



Available wattage:



Colours available:




Colour & Material:

Colour: White RAL9003
Aluminium extruded with
Polystyrene optic material

*600mm x 600mm pictured

Power (W)	25W	25W	50W
Lumens	3100lm	3100lm	5500lm
CCT (K)	4000K/5000K/ 6500K	4000K/5000K/ 6500K	4000K/5000K/ 6500K
Size	600mmx600mm	300mmx1200mm	600mmx1200mm
Quick code	PANEL6X6CCT	PANEL3X12CCT	PANEL6X12CCT

Power (W)	A (mm)	B (mm)	C (mm)
25W	595	595	34
25W	295	1195	34
50W	595	1195	34

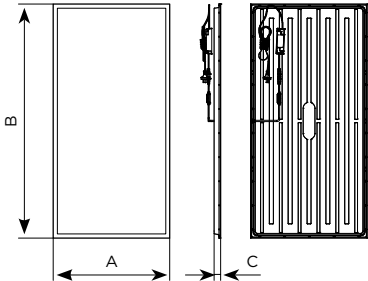

IP20

20,000 hours

2 years warranty

IK02

With plug

800mm (cable)



Tri-colour LED Downlight

Available wattage:

7.5W

Colours available:

WW

NW

DL




Colour & Material:

- Colour: White RAL9003
- Metal-plastic housing
- Polycarbonate reflector and optic material
- Stainless steel fixations
- Frosted lens cover

Power (W)	7.5W
IC	4
Lumens	800lm
CCT (K)	3000K/4000K/6500K
Size	90mm
Quick code	DOWNLIGHT90CCT

Power (W)	A (mm)	B (mm)	C (mm)
7.5W	56	114	86.5

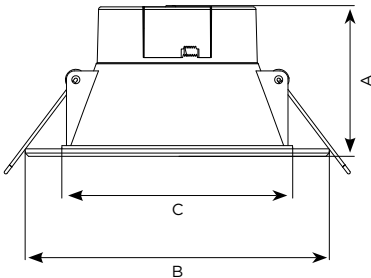

- IP40/IP54 front
- 20,000 hours
- 2 years warranty
- Dimmable
- With plug
- 800mm (cable)



Standard LED Batten



Available wattage: Colours available:

20W

40W

NW

CW


DL

Colour & Material:

Colour: White RAL9003
Housing Steel
Polycarbonate diffuser

Power (W)	20W	40W
Lumens	2000lm & 2100lm	4000lm & 4400lm
CCT (K)	4000K/5000K/6500K	4000K/5000K/6500K
Size	600mm	1200mm
Quick code	BATTEN600CCT	BATTEN1200CCT

Power (W)	A (mm)	B (mm)	C (mm)
BW307 20W	600	65±1.5	65±1.5
BW307 40W	1135	65±1.5	65±1.5

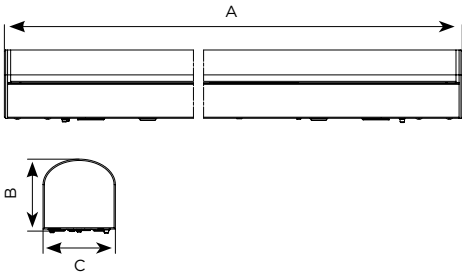

CRI >80

20,000 hours

2 years warranty



Weatherproof LED Batten



Available wattage: Colours available:

20W

40W

NW

CW


DL

Colour & Material:

Colour: Grey RAL7035
Housing & cover polycarbonate

Power (W)	20W	40W
Lumens	2000lm	4000lm
CCT (K)	4000K/5000K/6500K	4000K/5000K/6500K
Size	600mm	1200mm
Quick code	BATTENWP600CCT	BATTENWP1200CCT

Power (W)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	J (mm)
20W	636	620	102	98	330	79	81	407	77	253
40W	1176	1160	102	98	770	79	81	927	157	613

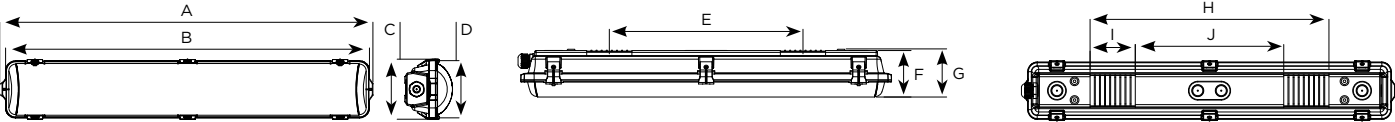

IP65

20,000 hours

2 years warranty

IK08

Back and side cable entry

Cable cover



LED Highbay

Available wattage:

- 160W
- 200W

Colours available:

- CW




Colour & Material:

Colour: Black RAL9005
Die-cast aluminium
Glass diffuser

Power (W)	160W	200W
Lumens	20000lm	25000lm
CCT (K)	5000K	5000K
Size	270mm	320mm
Quick code	HIGHBAY160W	HIGHBAY200W
Beam angle	Wide	Wide

Power (W)	A (mm)	B (mm)	C (mm)
160W	270	48	100
200W	320	51	102

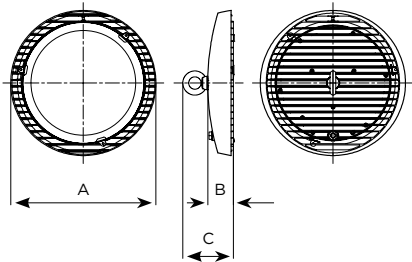

Hook is included

- IP65
- 20,000 hours
- 2 years warranty
- IK06
- With plug
- 800mm (cable)



LED Flood Light

Available wattage:

30W

50W

70W

100W

150W

200W

Colours available:

NW




Colour & Material:

Colour: Black RAL9011
Aluminium housing
Glass diffuser

Power (W)	30W	50W	70W	100W	150W	200W
Lumens	2850lm	4750lm	6650lm	9500lm	14250lm	19000lm
CCT (K)	4000K	4000K	4000K	4000K	4000K	4000K
Beam angle	Symmetrical wide	Symmetrical wide	Symmetrical wide	Symmetrical wide	Symmetrical wide	Symmetrical wide
Quick code	FLOOD30W	FLOOD50W	FLOOD70W	FLOOD100W	FLOOD150W	FLOOD200W

Power (W)	A (mm)	B (mm)	C (mm)
30W	185	161	28
50W	223	182	31
70W	276	217	31
100W	324	256	38
150W	385	298	41
200W	452	342	45

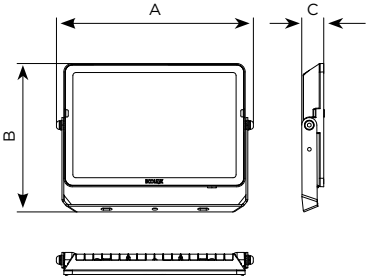

IP65

20,000 hours

2 years warranty

IK06

Operating temp
-40° to +50°

600mm cable length



LED Lamp B22

Available wattage:

9W

11W

13W

Colours available:

WW

DL




Colour & Material:

Colour: Frosted finish
Aluminium housing
Glass diffuser

Power (W)	9W	11W	13W
Lumens	900lm/950lm	1150lm/1250lm	1350lm/1450lm
CCT (K)	3000K/6500K	3000K/6500K	3000K/6500K
Beam angle	150 degrees	150 degrees	150 degrees
Customer order code	9WB223KA60, 9WB226.5KA60	11WB223KA60, 11WB226.5KA60	13WB223KA60 13WB226.5KA60

Power (W)	A (mm)	B (mm)
9W	108	60
9W	108	60
11W	108	60
11W	108	60
13W	120	60
13W	120	60

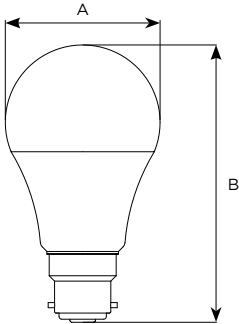

IP20

12,000 hours

2 years warranty

IK02

B22

Plastic diffuser



LED Lamp E27

Available wattage:

9W

11W

13W

Colours available:

WW

DL




Colour & Material:

Colour: Frosted finish
Aluminium housing
Glass diffuser

Power (W)	9W	11W	13W
Lumens	900lm/950lm	1150lm/1250lm	1350lm/1450lm
CCT (K)	3000K/6500K	3000K/6500K	3000K/6500K
Beam angle	150 degrees	150 degrees	150 degrees
Customer order code	9WE273KA60, 9WE276.5KA60	11WE273KA60, 11WE276.5KA60	13WE273KA60, 13WE276.5KA60

Power (W)	A (mm)	B (mm)
9W	108	60
9W	108	60
11W	108	60
11W	108	60
13W	120	60
13W	120	60

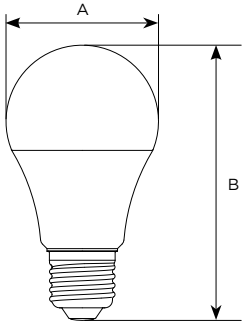

IP20

12,000 hours

2 years warranty

IK02

E27

Plastic diffuser

ecolinklighting.com.au

© 2023 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Version 2

