

The logo for ECOLINK, featuring the word "ECOLINK" in a bold, sans-serif font. The "ECO" part is green, and the "LINK" part is purple. A small white lightbulb icon is integrated into the letter "K".

Scan to know more

Stay connected with us:

@ecolinkindia.com

ecolinkindia@ecolinkindia.com

<https://www.ecolinklighting.com>

A woman with long dark hair, wearing a white halter-neck jumpsuit with a cutout at the waist, stands in a modern living room. She is smiling and making an 'OK' hand gesture. The room features a grey sectional sofa, a low wooden console table with a plant, and a ceiling with recessed lighting and a large, curved, illuminated light fixture. The overall atmosphere is warm and contemporary.

A complete
lighting world

Illuminating everyday living


EcoLink was created with a vision to illuminate spaces through technologically advanced and competitively priced lighting fixtures. Designed specifically for Indian homes, EcoLink luminaires are built to perform reliably in everyday conditions.

Equipped with revolutionary VoltSafe Technology, EcoLink lights are engineered to withstand drastic voltage fluctuations, ensuring consistent performance and longer life.

Each EcoLink product is durable, long-lasting, energy-efficient, and easily available at pocket-friendly prices, making quality lighting accessible to more homes.

When you choose EcoLink, you don't just choose a luminaire.

You get linked to illumination.

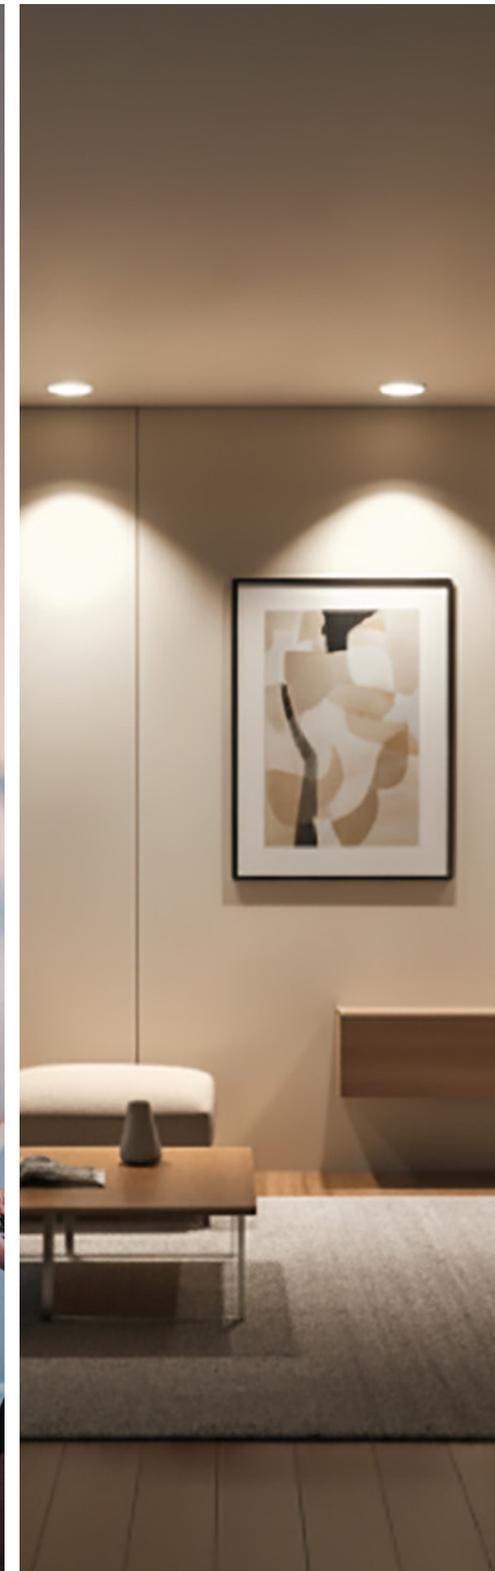

Quality lighting solutions from Signify



Signify

From the house of Signify, world leaders in lighting

With a legacy of excellence and a commitment to delivering unrivalled quality, our lighting solutions redefine illumination, setting new standards in performance, design, and reliability



Made in India

Experience the pride and excellence of Indian manufacturing, bringing radiance to your world.



Trustworthy and Reliable Products

Trust backed by years of research, quality assurance, and satisfied customers.

Reliable and energy efficient with VoltSafe



VoltSafe Technology

VoltSafe Technology

EcoLink's wide range of luminaires comes with the revolutionary VoltSafe Technology which ensures surge protection of 2.5kV with a wide voltage protection 160-360V.



Energy Saving

Our cutting-edge solutions are meticulously designed to minimize power consumption without compromising on brightness or quality, reducing your environmental footprint while maximizing cost savings



Long Lasting

Built with durable components and quality materials, EcoLink lights are designed to perform reliably over time. They deliver consistent brightness and dependable performance, day after day.



INDEX

LED LUMINAIRES	08 - 22
LED LAMPS	33 - 48
HOME LUMINAIRE	49 - 52
LED BATTEN	53 - 64
PROFESSIONAL RANGE	65 - 74
STRIP & ROPE LIGHT	75 - 80
ACCESSORIES	81 - 96
CONVENTIONAL RANGE	97 - 102



LED LUMINAIRES

Our EcoLink LED Luminaires range is a remarkable collection of lighting solutions that are long-lasting, sustainable, available in multiple colour options, and highly reliable. They are designed to majestically brighten up your space.





OPTIMA NEXT



KEY FEATURES:



APPLICATIONS



WATTAGE	PRODUCT DIMENSIONS (MM)		CUT OUT SIZE (MM)		LUMEN (+/-10%)	MRP
	ROUND	SQUARE	ROUND	SQUARE		
6W	L:120, W:120, H:12	L:120, W:120, H:12	Ø 102	102 X 102	420 Lumens	490
9W	L:120, W:120, H:12	L:120, W:120, H:12	Ø 102	102 X 102	720 Lumens	590
12W	L:150, W:150, H:12	L:150, W:150, H:12	Ø 127	127 X 127	1200 Lumens	670
15W	L:170, W:170, H:12	L:170, W:170, H:12	Ø 152	152 X 152	1500 Lumens	730
18W	L:190, W:190, H:12	L:190, W:190, H:12	Ø 175	175 X 175	1800 Lumens	930
22W	L:225, W:225, H:12	L:225, W:225, H:12	Ø 203	203 X 203	2200 Lumens	1150


**Applicable for 12W and above

*Lumen measured for CW variant in standard test condition. All features mentioned are under standard condition. Specifications are subject to change with prior notice.

Product image shown in the packaging is for representation only, actual product may vary.



LUMINA

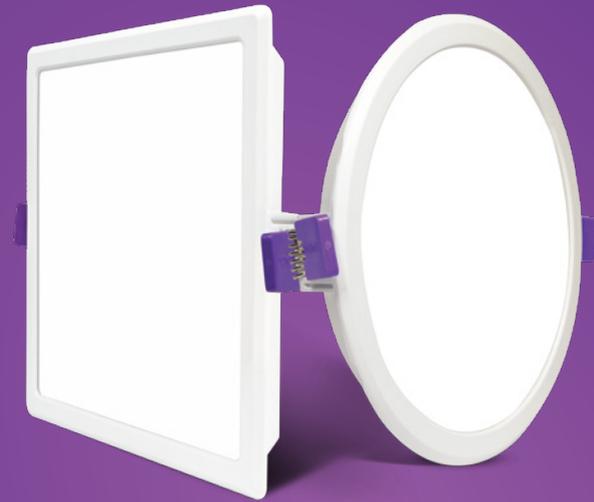

KEY FEATURES:



Uniform brightness



100 lumen per watt[#]



VoltSafe Technology



Surge Protection up to 3.0 kV

APPLICATIONS



Living room



Corridors



Displays



Small shops

WATTAGE	PRODUCT DIMENSIONS (MM)		CUT OUT SIZE (MM)		LUMEN (+/-10%)	MRP
	ROUND	SQUARE	ROUND	SQUARE		
5W	L:82, W:82, H:36		Ø 62	62 X 62	400 Lumens	330
10W	L:116, W:116, H:36		Ø 100	100 X 100	1000 Lumens	480
12W	L:145, W:145, H:36		Ø 125	125 X 125	1200 Lumens	550
15W	L:166, W:166, H:36		Ø 150	150 X 150	1500 Lumens	650
20W	L:220, W:220, H:36		Ø 205	205 X 205	2000 Lumens	850

[#]Applicable for 10W and above

^{*}Lumen measured for CW variant in standard test condition.

All features mentioned on packaging are under standard condition. Specifications are subject to change with prior notice.

Product image shown in the packaging is for representation only, actual product may vary.



ECOLINK SPECTRA 3-in-1



KEY FEATURES:



Uniform brightness



VoltSafe Technology



APPLICATIONS



Living room



Corridors



Displays



Small shops

WATTAGE	PRODUCT DIMENSIONS (MM)		CUT OUT SIZE (MM)		LUMEN (+/-10%)	MRP
	ROUND	SQUARE	ROUND	SQUARE		
10W	L:128, W:128, H:23		Ø 110	110 X 110	75 Lumens	690
15W	L:170, W:170, H:23		Ø 152.4	152.4 X 152.4	75 Lumens	950

*Lumen measured for CW variant in standard test condition.
All features mentioned on packaging are under standard condition.
Specifications are subject to change with prior notice.

Product image shown in the packaging is for representation only, actual product may vary.



2 INCH SHALLOW JB



KEY FEATURES:



Available in WW, NW, CW & 4 Color RGBP



Bright light output



Sleek design



VoltSafe Technology



UV Protection No harmful UV/IR radiation



Strength & longer life

APPLICATIONS



Living room



Corridors



Displays



Small shops

WATTAGE	PRODUCT DIMENSIONS (MM)			CUT OUT SIZE (MM)	LUMEN (+/-10%)	MRP
	ROUND			ROUND		
3W	L:75	W:75	H:18.5	Ø 43	240 Lumens	148

*Lumen measured for CW variant in standard test condition. All features mentioned on packaging are under standard condition. Specifications are subject to change with prior notice.

Product image shown in the packaging is for representation only, actual product may vary.



2 INCH DEEP JB



KEY FEATURES:



Uniform brightness



Strength & longer life



Wide voltage protection
160V-360V



Surge Protection
up to 3.0 kV

APPLICATIONS



Home



Living room



Corners



Displays



Small shops

WATTAGE	PRODUCT DIMENSIONS (MM)	CUT OUT SIZE (MM)	LUMEN (+/-10%)	MRP
	ROUND			
6W	L:85, W:85, H:56	Ø 45	480 Lumens	230
12W	L:140, W:140, H:56	Ø 45	960 Lumens	430

*Lumen measured for CW variant in standard test condition.
All features mentioned on packaging are under standard condition.
Specifications are subject to change with prior notice.

Product image shown in the packaging is for representation only, actual product may vary.



ECOLINK 3 INCH JB



KEY FEATURES:



Available in WW, NW, CW & 4 Color RGBP (5W)



Bright light output



Surge Protection up to 3.0 kV



UV Protection No harmful UV/IR radiation



Strength & longer life



Wide Voltage protection 160V-360V

APPLICATIONS



Living room



Corridors



Displays



Small shops

WATTAGE	PRODUCT DIMENSIONS (MM)		CUT OUT SIZE (MM)		LUMEN (+/-10%)	MRP
	ROUND		ROUND			
5W*	L:108, W:108, H:26	Ø 80	500 Lumens	210		
7W	L:108, W:108, H:26	Ø 80	630 Lumens	270		
10W	L:108, W:108, H:34	Ø 80	700 Lumens	290		

*Red, Green, Blue, Pink in 5W Only

*Lumen measured for CW variant in standard test condition. All features mentioned on packaging are under standard condition. Specifications are subject to change with prior notice.

Product image shown in the packaging is for representation only, actual product may vary.



4 INCH JB



KEY FEATURES:



Available in WW, NW, CW & 4 Color RGBP (5W)



Bright light output



No harmful UV/IR radiation



Strength & longer life



Wide Voltage protection 160V-360V

APPLICATIONS



Living room



Corridors



Displays



Small shops

WATTAGE	PRODUCT DIMENSIONS (MM)		CUT OUT SIZE (MM)		LUMEN (+/-10%)	MRP
	ROUND		ROUND			
7W	L:128, W:128, H:23	Ø 110	420 Lumens	400		
10W	L:128, W:128, H:23	Ø 110	700 Lumens	475		

*Lumen measured for CW variant in standard test condition. All features mentioned on packaging are under standard condition. Specifications are subject to change with prior notice.

Product image shown in the packaging is for representation only, actual product may vary.



SURFACE FULL GLOW



KEY FEATURES:



Available in WW, NW, CW



Uniform brightness



Extra wide diffuser



3-in-1 in 15W



Strength & longer life

APPLICATIONS



Living room



Corridors



Displays



Small shops

WATTAGE	PRODUCT DIMENSIONS (MM)		LUMEN (+/-10%)	MRP
	ROUND			
10W	L:102, W:102, H:40	750 Lumens	385	
15W	L:134, W:134, H:40	1125 Lumens	485	
22W	L:180, W:180, H:40	1600 Lumens	735	

*Lumen measured for CW variant in standard test condition.
All features mentioned on packaging are under standard condition.
Specifications are subject to change with prior notice.

Product image shown in the packaging is for representation only, actual product may vary.



SURFACE STRIKER



KEY FEATURES:



Available in WW, NW, CW & RGB



Super slim body



Wide diffuser area



Long life EcoLink LED driver included

APPLICATIONS



Living room



Corridors



Displays



Small shops

WATTAGE	PRODUCT DIMENSIONS (MM)	LUMEN (+/-10%)	MRP
	ROUND		
3W*	L:68, W:68, H:13.50	150 Lumens	160

*Lumen measured for CW variant in standard test condition. All features mentioned on packaging are under standard condition. Specifications are subject to change with prior notice. RGBP available for 3W only.

Product image shown in the packaging is for representation only, actual product may vary.



TILTABLE COB



KEY FEATURES:



Focussed beam



Durable aluminium heat sink



Adjustable light with tilt: 25 degree

APPLICATIONS



Home



Living room



Corners



Kitchen

WATTAGE	PRODUCT DIMENSIONS (MM)	CUT OUT SIZE (MM)	LUMEN (+/-10%)	MRP
	ROUND	ROUND		
7W	L:82, W:82, H:56	Ø 77	475 Lumens	900
12W	L:105, W:105, H:66	Ø 92	900 Lumens	1150
20W	L:120, W:120, H:80	Ø 110	1500 Lumens	1850

*Full metal body available in 20W.

*Lumen measured for NW variant in standard test condition. All features mentioned on packaging are under standard condition. Specifications are subject to change with prior notice.

Product image shown in the packaging is for representation only, actual product may vary.



2W MINI SPOT



KEY FEATURES:

 Ultra slim profile with integrated driver

 WW  NW  CW

 Red  Green  Blue

APPLICATIONS



Wardrobes



Cabinets



Showcases

WATTAGE	PRODUCT DIMENSIONS (MM)	CUT OUT SIZE (MM)	LUMEN (+/-10%)	MRP
	ROUND	ROUND		
2W	L:42, W:42, H:16	Ø 35	100 Lumens	150

All features mentioned on packaging are under standard condition. Specifications are subject to change with prior notice.

Product image shown in the packaging is for representation only, actual product may vary.

LAMPS

EcoLink has a wide range of energy-efficient lamps, crafted to illuminate your space. You can find general lighting to emergency lights, scene switch modes and multiple wattage options.





Good for reading



Cool White



For leisure time



Natural White



For intended ambience



Warm White

SCENE SWITCH LED LAMP



KEY FEATURES:



3-in-1:
Three light colors



VoltSafe
Technology



RoHS
compliant



APPLICATIONS



Living room



Bedroom

SHAPE	SCENE SWITCH
Power	10W
Rated Lumens (CW)	850-950
Color Temperature (CCT)	CW+NW+WW
Base Cap	B22
THD	<30
Power Factor	> 0.9
Lifetime (in hours)	NA
Approval	BIS

Master pack size 24

Rated lumens measured for highest wattage in standard test conditions. Turning on/off within 4 seconds switches to the next mode. Specifications are subject to change without prior notice.



LOW & MID WATTAGE LED BULB



KEY FEATURES:



APPLICATIONS



POWER	3W	5W	7W	9W	10W
Rated Lumens (CW)	315	525	630	825	950
Shape	A50	A55	A55	A60	A60
Color Temperature (CCT)	CW/WW	CW/WW	CW/WW	CW/WW	CW
Base Cap	B22	B22	B22	B22	B22
THD	<50	<30	<30	<30	<30
Power Factor	> 0.9	> 0.9	> 0.9	> 0.9	> 0.9
Lifetime (in hours)	10K	10K	10K	10K	10K
Approval	BIS+BEE	BIS+BEE	BIS+BEE	BIS+BEE	BIS+BEE

Rated lumens measured in standard test conditions. Specifications are subject to change without prior notice.



HIGH WATTAGE LED BULB



KEY FEATURES:



APPLICATIONS



Living room



Bedroom

POWER	12W	14W	18W	22W
Rated Lumens (CW)	1080	1260	1620	1980
Shape	A60	A70	A70	A80
Color Temperature (CCT)	CW/WW	CW/WW	CW/WW	CW/WW
Base Cap	B22	B22	B22	B22
THD	<30	<30	<30	<30
Power Factor	> 0.9	> 0.9	> 0.9	> 0.9
Lifetime (in hours)	10K	10K	10K	10K
Approval	BIS+BEE	BIS+BEE	BIS+BEE	BIS+BEE

Rated lumens measured in standard test conditions. Specifications are subject to change without prior notice.



SUPER HIGH WATTAGE LED BULB



KEY FEATURES:



VoltSafe
Technology



RoHS
compliant



APPLICATIONS



Retail



Balcony

POWER	36W	45W	55W
Rated Lumens (CW)	3000	4000	5000
Shape	T100	T120	T140
Color Temperature (CCT)	CW	CW	CW
Base Cap	B22	B22	B22
THD	<30	<30	<30
Power Factor	> 0.9	> 0.9	> 0.9
Lifetime (in hours)	10K	10K	10K

Rated lumens measured in standard test conditions.
Specifications are subject to change without prior notice.



EMERGENCY BULB



KEY FEATURES:

 Up to 4 hrs of backup

 Rechargeable

 VoltSafe Technology

 RoHS compliant

 1 YEAR WARRANTY

 CRI 80

APPLICATIONS

 Living room

 Bedroom

 Home

POWER	9W	14W	20W
AC Rated Lumens	900	1200	1800
Backup hours (up to)	4 hrs	4 hrs	4 hrs
Shape	A70	A70	A90
Color Temperature (CCT)	CW	CW	CW
Base Cap	B22	B22	B22
Power Factor	> 0.9	> 0.9	> 0.9

Rated lumens measured in standard test conditions. Specifications are subject to change without prior notice.



LED T-BULB



KEY FEATURES:



Flexible body



Unique T-shape T-Bulb



Wider light spread



Lamp holder friendly



VoltSafe Technology



RoHS compliant



APPLICATIONS



Bedroom



Study

POWER	12W	15W
Rated Lumens	1080	1350
Color Temperature (CCT)	CW	CW
Base Cap	B22	B22
THD	<30%	<30%
Power Factor	> 0.9	> 0.9
Lifetime (in hours)	15K	15K
Approval	BIS+BEE	BIS+BEE
Master pack size	24	12

Rated lumens measured in standard test conditions. Specifications are subject to change without prior notice.

On



Off

MOTION SENSING BULB



KEY FEATURES:



Senses motion



Rated lumen: 900



VoltSafe Technology

CRI 80

APPLICATIONS



Washroom



Balcony



Living room



Staircase

SHAPE	A60 OVAL
Power	10W
Color Temperature (CCT)	CW
Rated Lumens	900
Base Cap	B22
Power Factor	> 0.9
Lifetime (in hours)	10K
Approval	BIS

Rated lumens measured in standard test conditions. Specifications are subject to change without prior notice.

HOME LUMINAIRES

The EcoLink Home Luminaires range is a universe of enchanting illumination. It offers an exquisite collection of luminaires that transform your living spaces into captivating realms of light and style.





LILIPUT LED RECHARGEABLE LIGHT



KEY FEATURES:

- Adjustable table lamp with torch
- Inbuilt USB charging
- Rechargeable lithium ion battery 3.7V 1500mAh
- Push on and off switch
- Overcharging and deep discharge protection
- Compact and handy design
- Travel friendly
- CW

PARAMETERS	MASTER PACK	MATERIAL	COLOUR	CCT	MRP ₹
3W (Pint)	48	Polycarbonate	Sea Green/White	CW	749
3W (Liliput)	48	Polycarbonate	Sea Green/White	CW	799

3W (Lilliput)

Size	L - 202mm x 66 mm
Charging Time	4 Hours
Backup time	4 hours for torch & 2 hours for table lamp
Battery protection	Overcharge & Deep Discharge Protection
Table lamp	120lm
Torch light	80lm

3W (Pint)

Size	L - 156mm x 43 mm
Charging time	3 Hours
Backup time	4 hours for Torch & 2 hours for Emergency Light

Lumen measured for CW variant in standard test condition. Specifications are subject to change with prior notice.

Warranty: 6 months from the date of purchase.



LED BATTENS

EcoLink LED Battens bring a world of sustainable lighting solutions. With a diverse range of high-quality designs, they majestically brighten your spaces while reinforcing your commitment to a greener tomorrow.





ECOLINK CHAMPION



KEY FEATURES:

 4 kV Surge protection

 VoltSafe Technology

 More brightness

 WW
 CW

APPLICATIONS



DESCRIPTION	WATTAGE	LUMENS/WATT	LENGTH (MM)	MRP
EcoLink Champion	25	100	1100	400
EcoLink Champion	30	100	1100	500
EcoLink Champion	36	100	1100	600

*Lumen measured for CW variant in standard test condition.
All features mentioned on packaging are under standard condition.
Specifications are subject to change with prior notice.

Warm White




Natural White



Cool White



ECOLINK 3 IN 1



KEY FEATURES:

 4 kV Surge protection

 VoltSafe Technology



APPLICATIONS



Living room



Home

DESCRIPTION	WATTAGE	LUMENS/WATT	LENGTH (MM)	MRP
EcoLink 3-in-1	20	100	1100	420

*Lumen measured for CW variant in standard test condition. All features mentioned on packaging are under standard condition. Specifications are subject to change with prior notice.



ECOLINK POWERPLUS INVERTER BATTEN



KEY FEATURES:



 4 kV Surge protection

 VoltSafe Technology

 Deep discharge and overcharge protection

 Back up of 4 hrs

APPLICATIONS



DESCRIPTION	WATTAGE	LUMENS/WATT	LENGTH (MM)	MRP
EcoLink Powerplus Inverter Batten	20	100	1200	920

*Lumen measured for CW variant in standard test condition.
All features mentioned on packaging are under standard condition.
Specifications are subject to change with prior notice.



ECOTRON



KEY FEATURES:

 4 kV Surge protection

 VoltSafe Technology

 Bright light source

 CW

APPLICATIONS

 Living room

 Home

DESCRIPTION	WATTAGE	LUMENS/WATT	LENGTH (MM)	MRP
Ecotron	20	100	600	600
Ecotron	40	100	1200	930
Ecotron	50	100	1200	1100

*Lumen measured for CW variant in standard test condition.
All features mentioned on packaging are under standard condition.
Specifications are subject to change with prior notice.



ECOLINK MARVEL



KEY FEATURES:

 4 kV Surge protection

 VoltSafe Technology

 WW
 NW
 CW

APPLICATIONS



Home



Staircase



Pathways



Kitchen



Bathrooms

DESCRIPTION	WATTAGE	LUMENS/WATT	LENGTH (MM)	MRP
EcoLink Marvel	05	100	300	170
EcoLink Marvel	10	100	600	180
EcoLink Marvel	20**	100	1100	210
EcoLink Marvel	22	100	1100	240
EcoLink Marvel	30	100	1100	400

**CW/NW only for 20W

*Lumen measured for CW variant in standard test condition.
 All features mentioned on packaging are under standard condition.
 Specifications are subject to change with prior notice.

PROFESSIONAL LIGHTING

Step into a world of lighting solutions with our EcoLink Professional range. This range also presents to you an array of products meticulously tailored to meet the unique requirements of professional environments.





TROFFER



KEY FEATURES:

 100 Lumens/Watt

 IP rating: IP20

 Surge protection up to 4 kV

 IK08 Impact resistant

 Power factor >0.9

 CRI >80

 CW

APPLICATIONS



Office spaces



Retail stores



Healthcare facilities and labs



Educational institutes

Parameters	36W
System Lumen	3600 lm
Efficacy	100 lm/w
Input Voltage Range	140-270V



STREET LIGHT



KEY FEATURES:

- 100 Lumens/Watt
- Sleek design with integrated driver
- IP66 water resistant
- Surge protection up to 4 kV
- Housing: Die cast aluminium
- IK07 Impact resistant
- CRI 80

APPLICATIONS

- City roads
- Highway
- Park and playground
- Outdoor lighting
- Campus

Parameters	UoM	25W	35W	45W	70W	90W	120W
System Power	Watts	25	35	45	70	90	120
System Lumen Output	Lm	≥ 2500	≥ 3500	≥ 4500	≥ 7000	≥ 9000	≥ 12000
CRI (Colour Rendering Index) Ra		≥ 80	≥ 80	≥ 80	≥ 80	≥ 80	≥ 80

All features mentioned on packaging are under standard condition. Specifications are subject to change with prior notice.



PC STREET LIGHT



KEY FEATURES:



100 Lumens/Watt



Sleek design with integrated driver



IP66 water resistant



Surge protection up to 4 kV



Housing: PC housing



IK07 Impact resistant



CRI 80

APPLICATIONS



Roadways



Parking lots



Playground



Residential outdoors

Parameters	20W	30W	50W
System Lumen Output (lumen)	≥2500	≥3500	≥5000
System Efficacy (Lm/W)	≥100	≥100	≥100
Input Power Factor	≥0.9	≥0.9	≥0.9
MRP			

All features mentioned on packaging are under standard condition. Specifications are subject to change with prior notice.



FLOOD LIGHT



KEY FEATURES:



100 Lumens/Watt



Sleek design with integrated driver



IP66 water resistant



Surge protection up to 4 kV



Power factor >0.9



IK07 Impact resistant



APPLICATIONS



City roads



Highway



Park and playground



Outdoor lighting



Campus

Parameters	30W	50W	70W	100W	150W	200W
System Lumens (Lumens)	3000	5000	7000	10000	15000	20000
System Efficacy (Lm/w)	100	100	100	100	100	100
Rated Input Voltage (Vac)	240	240	240	240	240	240
Operating Voltage Range (Vac)	140 -300 Vac					
MRP	1400	2200	3000	3400	8750	10500

*Lumen measured for CW variant in standard test condition.
All features mentioned on packaging are under standard condition.
Specifications are subject to change with prior notice.

STRIP AND ROPE LIGHTS

EcoLink Strip and Rope Lights bring a seamless blend of flexibility and brilliance. Designed to accentuate every corner, edge, or curve, they create elegant highlights and soft ambient glows that elevate both interiors and exteriors. With durable performance and versatile design, they transform ordinary spaces into radiant experiences of light and style.





STRIP LIGHTS



KEY FEATURES:

 Bright light output

 Uniform brightness

 WW
 NW
 CW

APPLICATIONS

 Living room

 Bedroom

 Profile channels

DESCRIPTION	WATTAGE	LED COUNT	LUMEN	DRIVER	IP RATING	DIMENSIONS
240 LED Strip Light	45W (9W/Meter)	240 LEDs/ Meter	900 Lm/Meter	12V 5A Driver	IP20	5000mm x 10mm x 2mm
120 LED Strip Light	33W (6.6W/Meter)	120 LEDs/ Meter	600 Lm/Meter	12V 5A Driver	IP20	5000mm x 8mm x 2mm

*Lumen measured for CW variant in standard test condition. Specifications are subject to change with prior notice.



ROPE LIGHTS



KEY FEATURES:



Bright light output



IP65 protection against dust and water



Slim design



WW

APPLICATIONS



Balcony



Festive decoration



Garden area



Porch area

DESCRIPTION	WATTAGE	LED COUNT	LUMEN	IP RATING	DIMENSIONS
120 LED Rope Light	400W (8W/Meter)	120 LEDs/Meter	700 Lm/Meter	IP65	50,000mm x 9.5mm x 4.5mm
72 LED Rope Light	300W (6W/Meter)	72 LEDs/Meter	400 Lm/Meter	IP65	50,000mm x 9.5mm x 4.5mm


*Lumen measured for CW variant in standard test condition. Specifications are subject to change with prior notice.

ACCESSORIES RANGE

Designed and developed to meet the safety needs of your home, our made-to-last lighting accessories and products are backed by VoltSafe Technology. This comprehensive range offers reliable, robust and user-friendly modular devices that make your home and workplace effortless to live-in.



ECOLINK SURGE & SPIKE GUARD

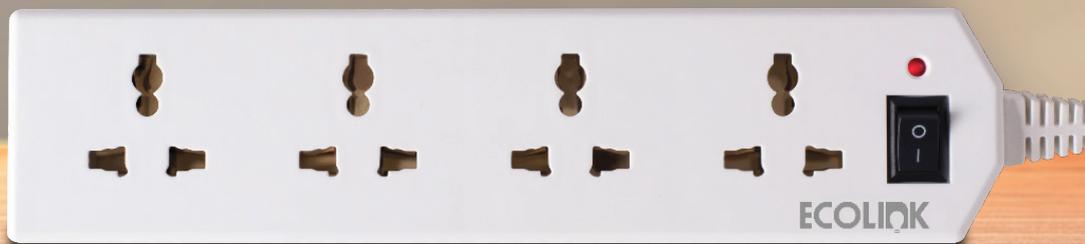

KEY FEATURES:



Easy to use



Fire resistant



RoHS compliant



VoltSafe Technology (Up to 3 kV only)

APPLICATIONS



Home



Office



Small shops



Educational Institutes

12NC	DESCRIPTION	MRP
915006653601	EcoLink Surge & Spike Guard Defender 1.5M	559
915006653701	EcoLink Surge & Spike Guard Defender 3.0M	600



ECOLINK DOORBELL - CHURCH BELL AND GAYATRI MANTRA BELL



CHURCH BELL



GAYATRI MANTRA BELL

KEY FEATURES:



Durable sleek design



Low power consumption



High sound output



Beautiful aesthetics:
Glossy finish



Runs on batteries (3V)
2 x 1.5V AA batteries



RoHS Compliant

APPLICATIONS



Home



Office



Small shops



Educational Institutes

12NC	DESCRIPTION	MRP
913715308101	EcoLink Church Doorbell	370
913715308201	EcoLink Gayatri Mantra Doorbell	370



ECOLINK DING DONG AND MUSICAL DOORBELL



KEY FEATURES:

 Durable sleek design

 Carbon tip for crisp audible sound

 Low power consumption

 Beautiful aesthetics: Glossy finish

 Working Voltage: 230 V AC

APPLICATIONS



Home



Office



Small shops




Educational Institutes

12NC	DESCRIPTION	MRP
913715278501	EcoLink Ding Dong Doorbell - Blue	286
913715278601	EcoLink Ding Dong Doorbell - Grey	286
913715278701	EcoLink Musical Doorbell - Cyan	326
913715278801	EcoLink Musical Doorbell - Grey	326

ECOLINK SPIKE GUARD



EcoLink Spike Guard
3 Socket 6A+ 2USB

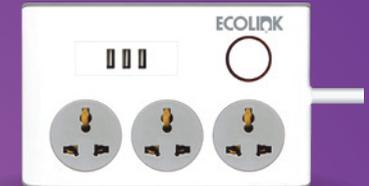

EcoLink Spike
Guard 3 Socket
6A+3USB



KEY FEATURES:

- Easy to use
- Fire resistant
- RoHS compliant
- VoltSafe Technology

APPLICATIONS

- Home
- Office
- Small shops
- Educational Institutes

12NC	DESCRIPTION	MRP
913715174201	EcoLink Spike Guard 3 Socket 6A + 2 USB (IMPETUS)	1408
913715174501	EcoLink Spike Guard 3 Socket 6A + 3USB (ADVANCE)	1263



ECOLINK SPIKE GUARD



EcoLink 4-Way Multiplug 6A (Secure)



EcoLink 4-Way Spike & Surge Guard 6A

KEY FEATURES:



Easy to use



Fire resistant



RoHS compliant



VoltSafe Technology

APPLICATIONS



Home



Office



Small shops



Educational Institutes

12NC	DESCRIPTION	MRP
913715174701	EcoLink 4-Way Spike & Surge Guard 6A Grey (SUPREMO)	559
913715174101	EcoLink 4-Way Multiplug 6A (SECURE)	368

ECOLINK SPIKE GUARD



EcoLink Spike Guard 4 Socket 4 Switch 6A



EcoLink Multiplug Socket 6A



KEY FEATURES:



Easy to use



Fire resistant



RoHS compliant



VoltSafe Technology

APPLICATIONS



Home



Office



Small shops



Educational Institutes

12NC	DESCRIPTION	MRP
913715174401	EcoLink Spike Guard 4 Socket 4 Switch 6A (LIBERTY)	992
913715174001	EcoLink Multiplug Socket 6A (Multiplug Socket)	200



ECOLINK DECO LAMP HOLDER



EcoLink Deco Lamp Holder
Straight/Angular White



EcoLink Deco Lamp Holder
Straight/Angular Blue/Pink



EcoLink Lamp Holder
Straight/Angular Economy



EcoLink ceiling rose
Small/Jumbo

KEY FEATURES:



Easy to use



Fire resistant



RoHS compliant



VoltSafe Technology



For all B22 lamp holder

APPLICATIONS



Home



Office



Small shops



Educational Institutes

12NC	DESCRIPTION	MRP
913715172401 /913715172501	EcoLink Deco Lamp Holder White (Straight/Angular)	66
913715172601 /913715172701	EcoLink Deco Lamp Holder Pink (Straight/Angular)	69
913715172801 /913715172901	EcoLink Deco Lamp Holder Blue (Straight/Angular)	69
913715173001 /913715173101	EcoLink Lamp Holder Economy (Straight/Angular)	35
913715173601	EcoLink Ceiling Rose Small	41
913715173701	EcoLink Ceiling Rose Jumbo	52

CONVENTIONAL LIGHTING

EcoLink Conventional Lighting range is where classic lighting solutions meet contemporary needs. Brighten up your space with timeless illumination and long-lasting performance lights.





GLS



KEY FEATURES:



Bright
ambience

APPLICATIONS



Home

Material	DESCRIPTION	HSN CODE	MRP
922801544201	EcoLink STD 100W A55 230V CL 1SL/100	85393190	20
922803344201	EcoLink STD 60W A55 230V CL 1SL/100	85393190	20
920030246211	EcoLink STD 200W A70 250V CL 1SL/50	85393190	45

TUBELIGHT & BALLAST



KEY FEATURES:

 10,000-hour life

 Light output
2450 lm

APPLICATIONS



Material	DESCRIPTION	HSN CODE	MRP
928005405463	36W EcoLink StarLight TubeLight	85393190	73
928009005431	40W EcoLink StarLight TubeLight	85393190	95
913712912004	EcoLink Electronic Ballast 36W	85041010	150

